



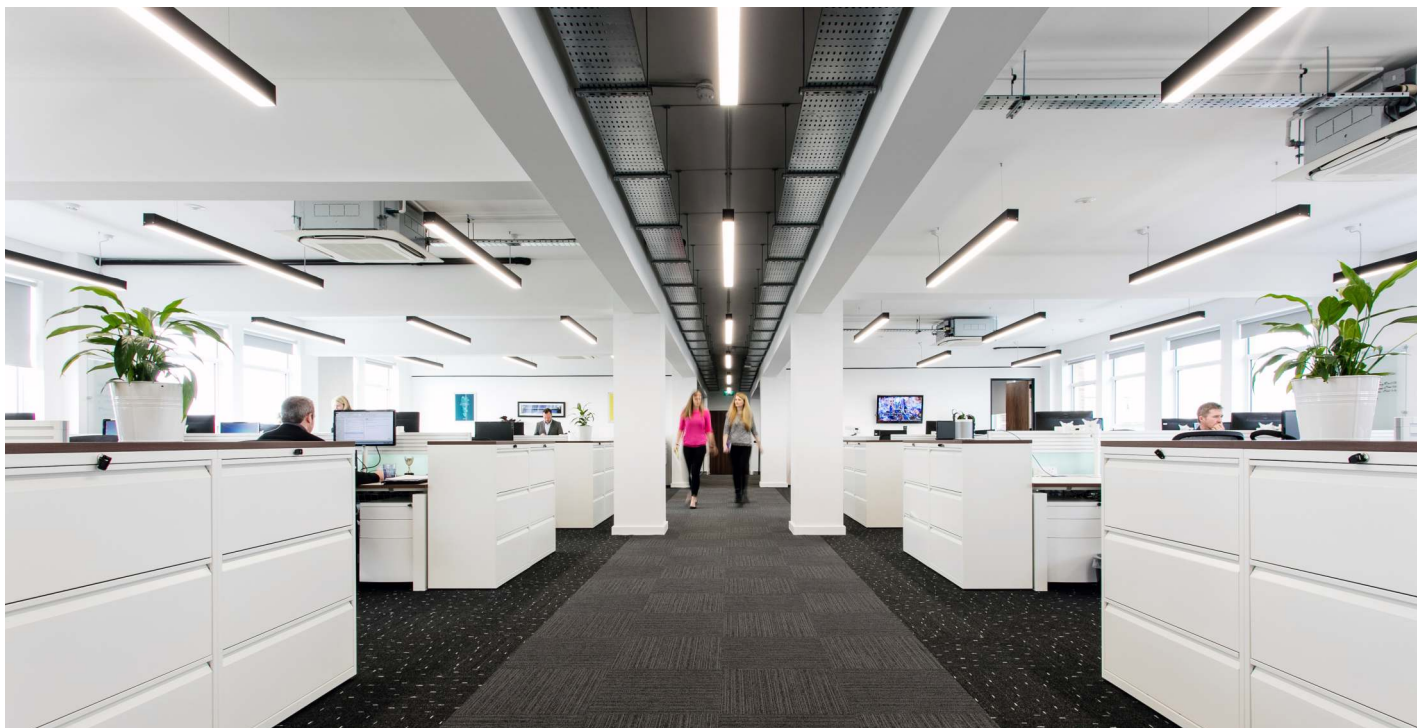

LED Linear Light-PF series

Model : OL-PF40W-120, OL-PF50W-150

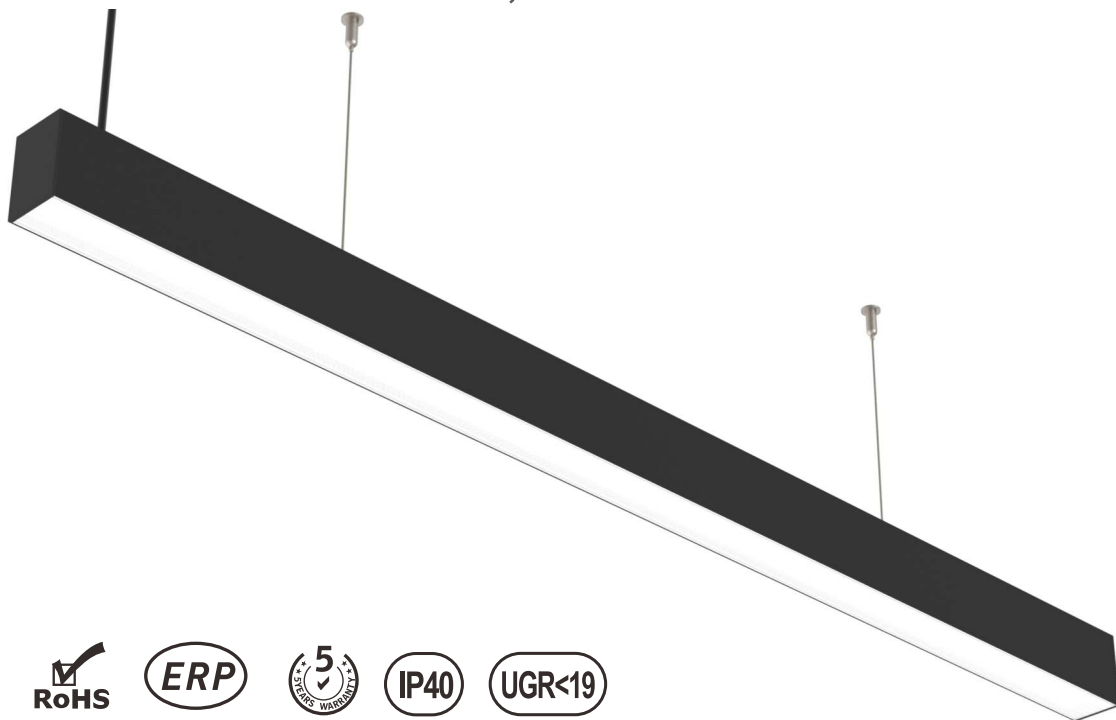

+86-755-23056637



www.olamled.com



8F, Building 2, Jinchi Industry Park,
Fuyuan 2Rd. Fuhai Street, Baoan
District, Shenzhen, China




vicky@olamled.com

● Colors



Black



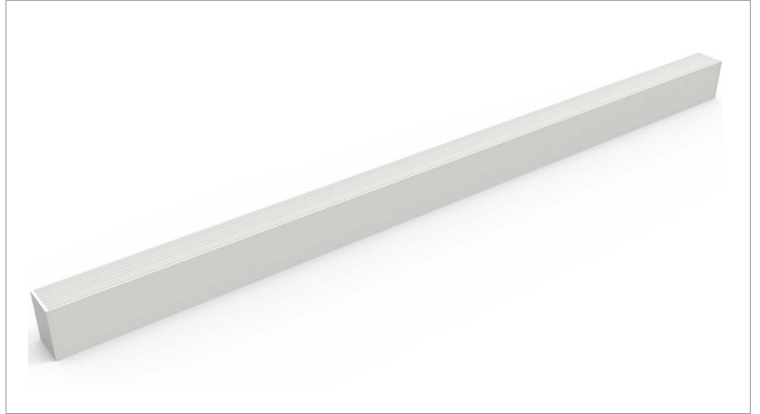


White

● Schematic View




Flexible PC diffuser plate, seamless linkable 1 by 1




● Features:

- › Simple and elegant design
- › Various connectable options are available for a variety of personalized installations
- › UGR<24 and UGR<19 for option
- › CRI>80Ra & 90Ra & 95Ra for option
- › Dimming: Non-Dimming, 1-10V dimming / Dali dimming
- › Colors: Black / White

● Various Accessories

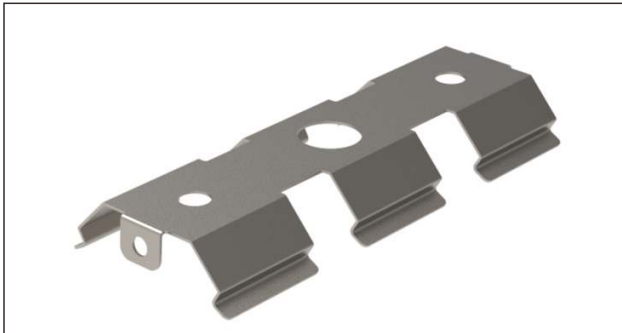


1. Mounting clip, suitable for ceiling mounting

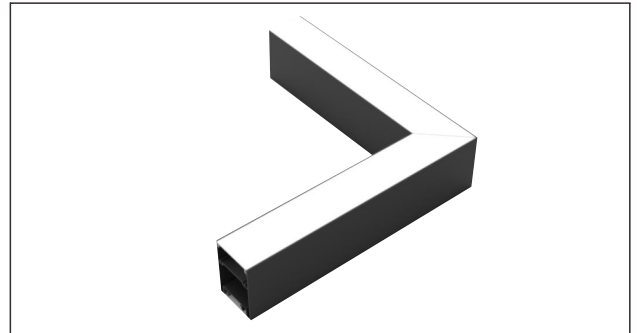


2. "L" shape connector




3. Soft PC Diffuser(MAX 5M)

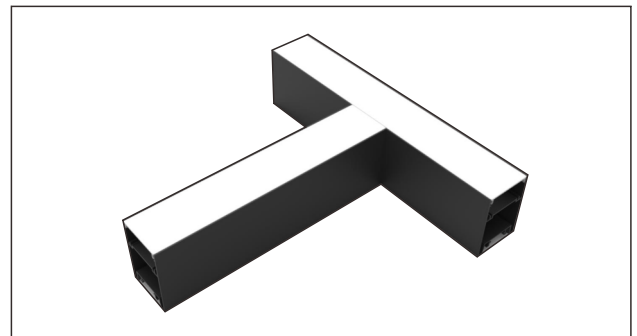

4. "T" shape connector

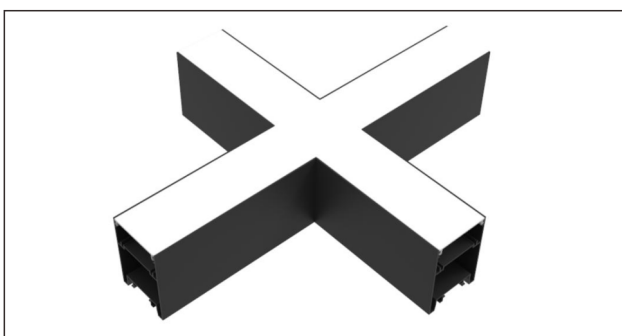

5. "X" shape connector

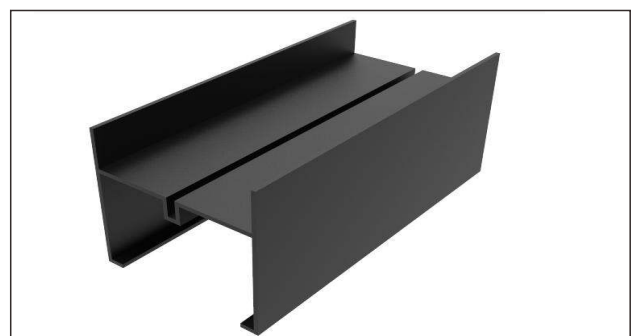

6. "—" shape connector




7. Connect cable

● Parameter

Dimensions	1200*50*70mm		1500*50*70mm	
Power	40W		50W	
LED Source	144pcs SMD2835/0.5W		180pcs SMD2835/0.5W	
Luminous Flux	5200lm	4400lm(UGR<19)	6500lm	5500lm(UGR<19)
Color	White/Black			
Texture of material	Aluminum+PC			
Insulation grade	II			
Operating Ambient	-25℃~45℃			
Rated Life Span	50000H			
Protection grade	IP20			
Light Angle	110°, 80° / UGR<19			
Input Voltage	AC220-240V			
Supply Frequency	50/60Hz			
Output Voltage	DC30-42V			
Output Current	1000mA		1200mA	
Power Factor	>0.95			
Energy Efficiency Index	90%±2			
THD	0.1			
Luminous Efficiency	>130lm/W			
CRI	>80Ra			
Color Temperature	3000K/4000K/5000K/6000K			
Warranty	5 Years			

● Packaging

Length	1500mm	1200mm
QTY/CTN	8pcs/Ctn	8pcs/Ctn
Net Weight (KG)	15.2KG	12.4KG
Gross weight (KG)	16.7KG	13.9KG
Inner box size(cm)	158.5x5.5x7.5cm	128.5x5.5x7.5cm
Carton size (cm)	160x18.5x17cm	130x18.5x17cm

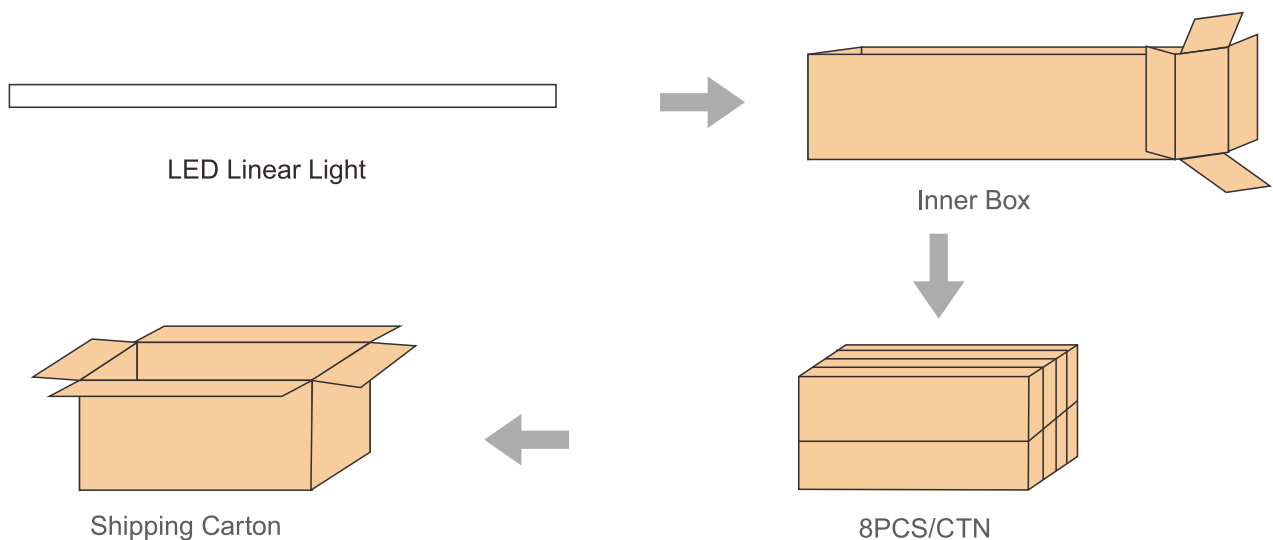





Caution

1. In case of electric shock, please make sure the power is off before installation.
2. The lamp should be installed and operated by a qualified electrician or technician in accordance with relevant local codes.
3. Do not use sharp tools near or on the surface of the lamp.
4. Unpack and examine the product carefully. Report any damage and save all packing materials if any portion of the product was damaged during transportation.

● Statement





1. It is only allowed to be used in indoor environments, OLAMLED promises a full warranty for the product.
2. Can not be used in any harsh environment, including high/low temperature, high humidity, high salinity, high ammonia, etc.
3. The warranty policy is no longer warranted in the event of any incorrect application

Seamless Linkable 1 by 1 "—" Shape form

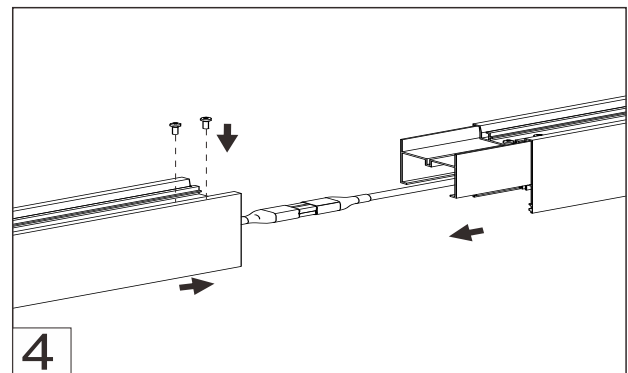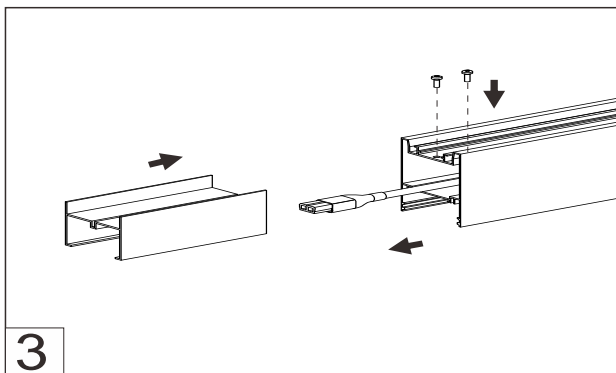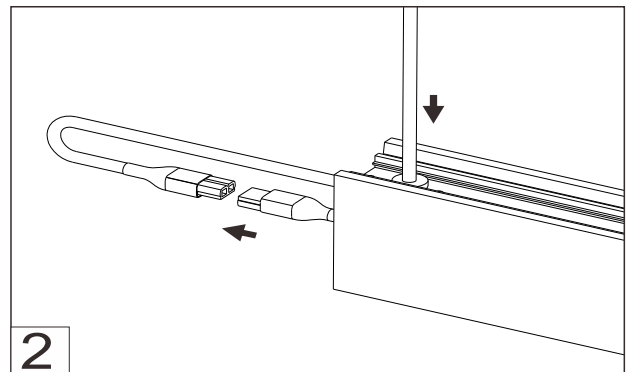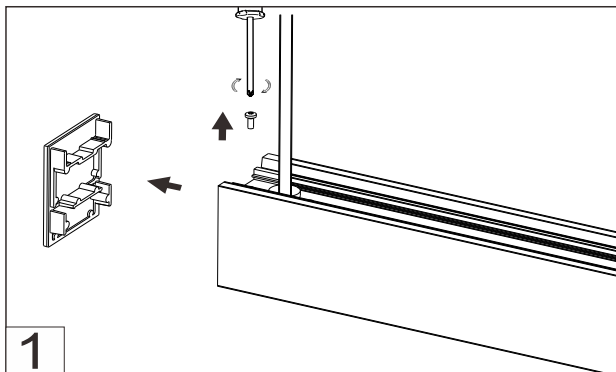

Seamless Linkable 1 by 1


"L" Shape form "T" Shape form "X" Shape form

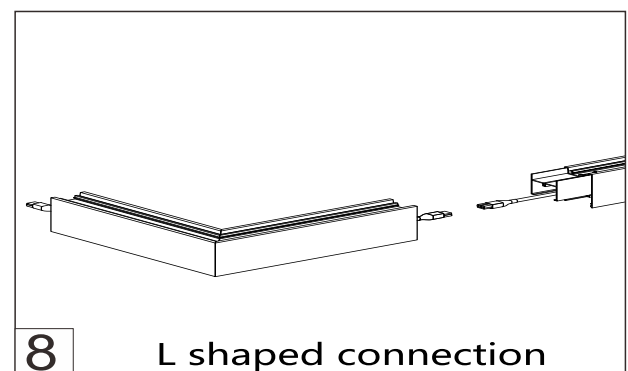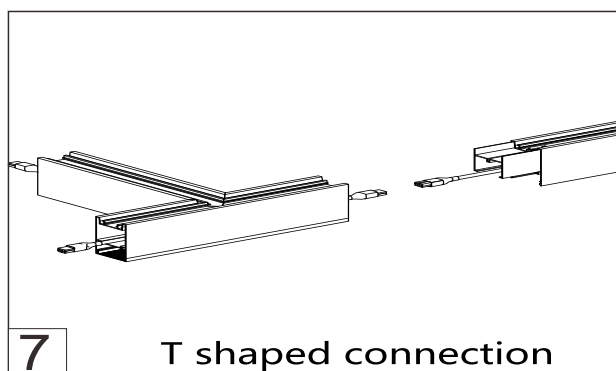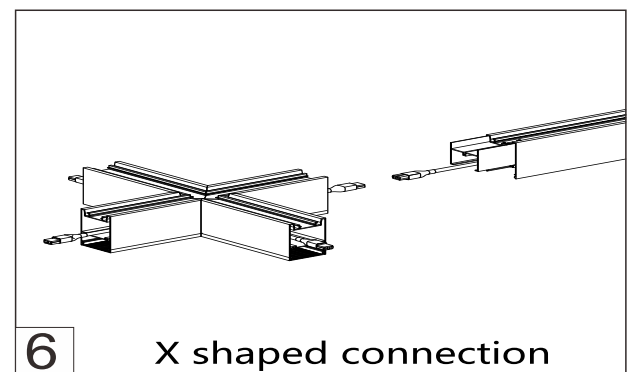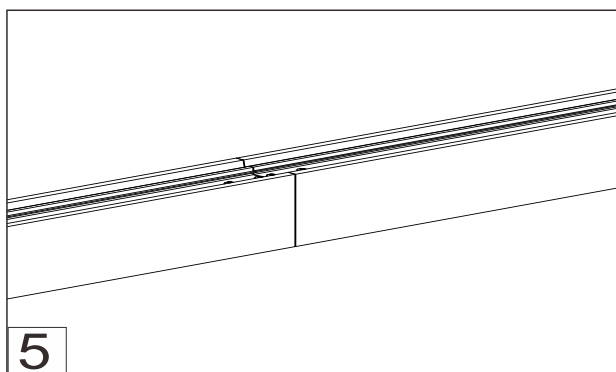


● Installation Methods



A: Suspension

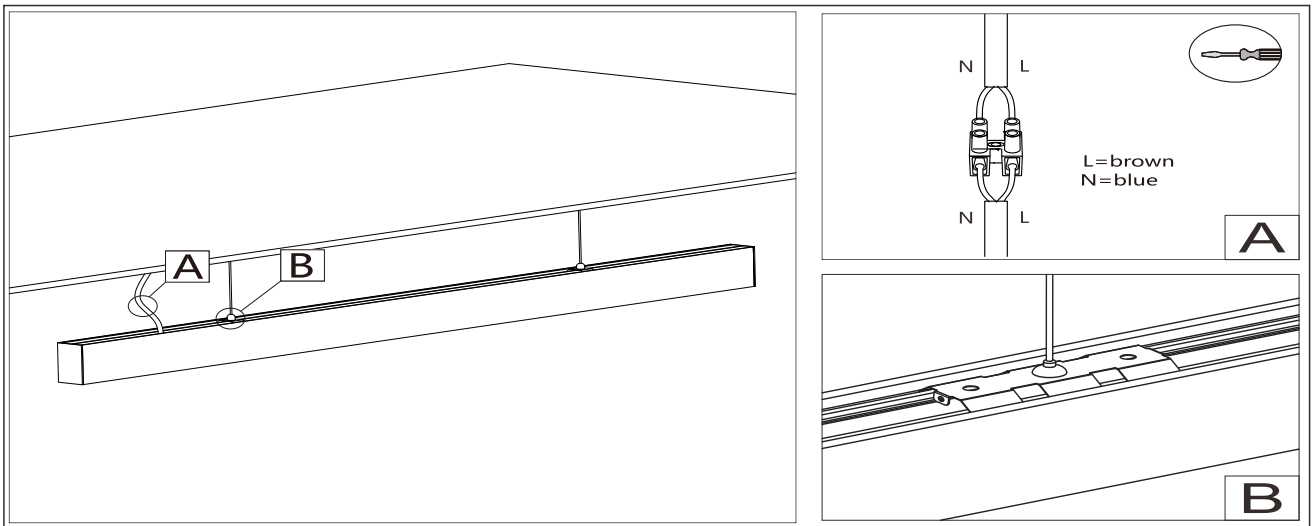


B: Surface Mounted

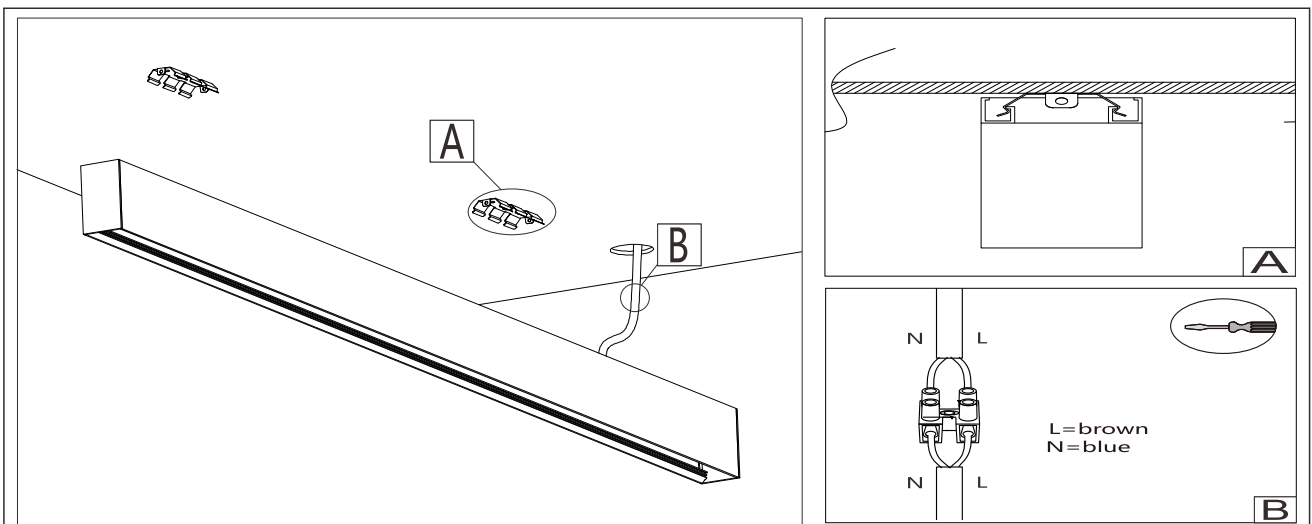

● Application Scenario

- » Office
- » Conference Room
- » Museum Room
- » Art Gellery
- » Store

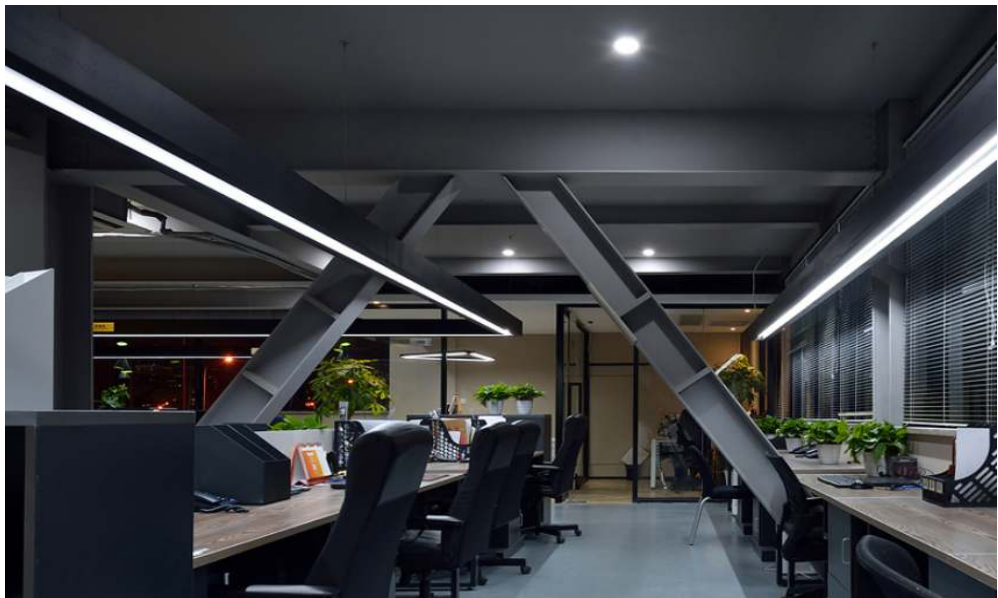

APPLICATION