




LED MODULAR PANEL LIGHT

Model : PG-2 Series(UGR<16)

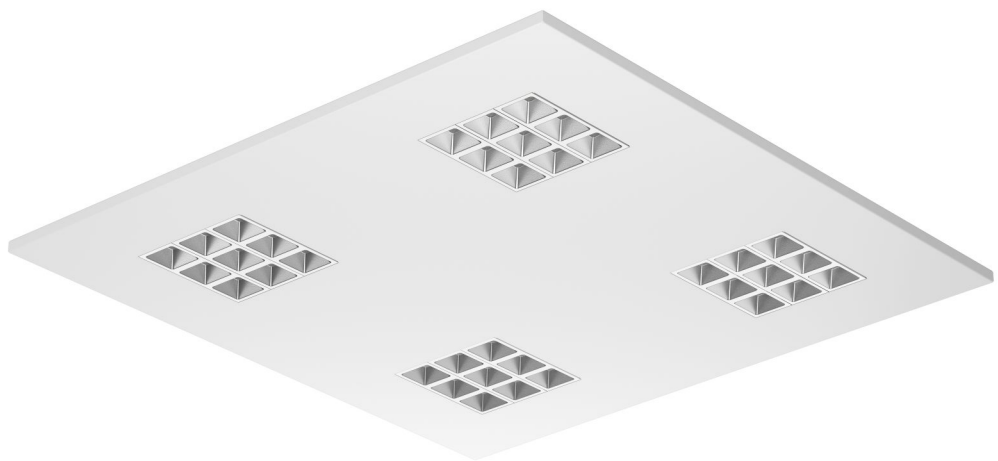

+86-755-23056637



www.olamled.com




8F, Building 2, Jinchi Industry Park,
Fuyuan 2Rd. Fuhai Street, Baoan
District, Shenzhen, China




vicky@olamled.com

More Combinations for Optional


- » Beam angle: 90°
- » Panel colors: White & Black
- » Reflectors color: White, Black, Silver, Clear

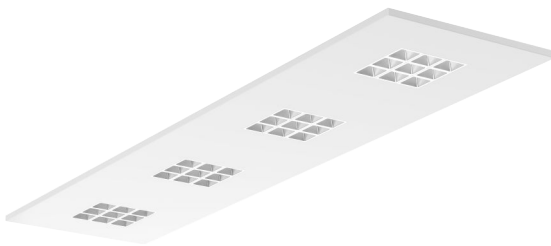


White panel with Silver reflectors

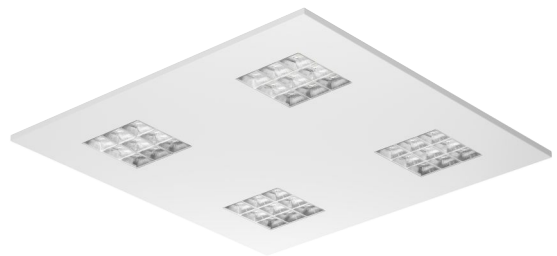

White panel with Clear reflectors

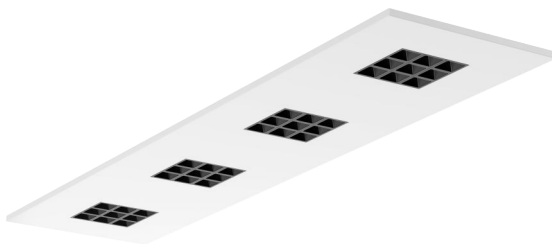

White panel with Black reflectors

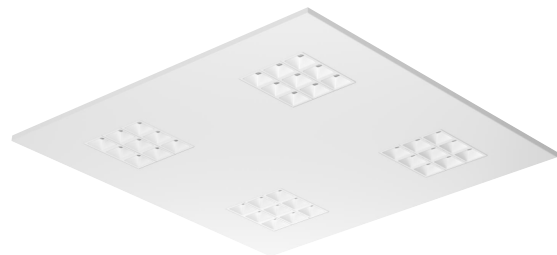


White panel with White reflectors


● Features:

- » Innovation design for protect eyes
- » Customizable Module Length & Panel Dimensions
- » UGR<16 / 90°
- » Luminous efficiency up to 160lm/W(80Ra), 150lm/W (90Ra)
- » Customized size available.
- » Light source : Lumileds SMD2835, CRI>80Ra, >90Ra
- » Driver optional: On/Off, 1-10V, DALI-2 etc.
- » Product Shell Color : White (Standard) , Black
- » Reflectors color: White, Black, Silver(electroplating),Clear
- » Different installation methods can be customized
- » Power DIP-Adjustable& CCT DIP-Adjustable for option

- **Innovative design on optics**

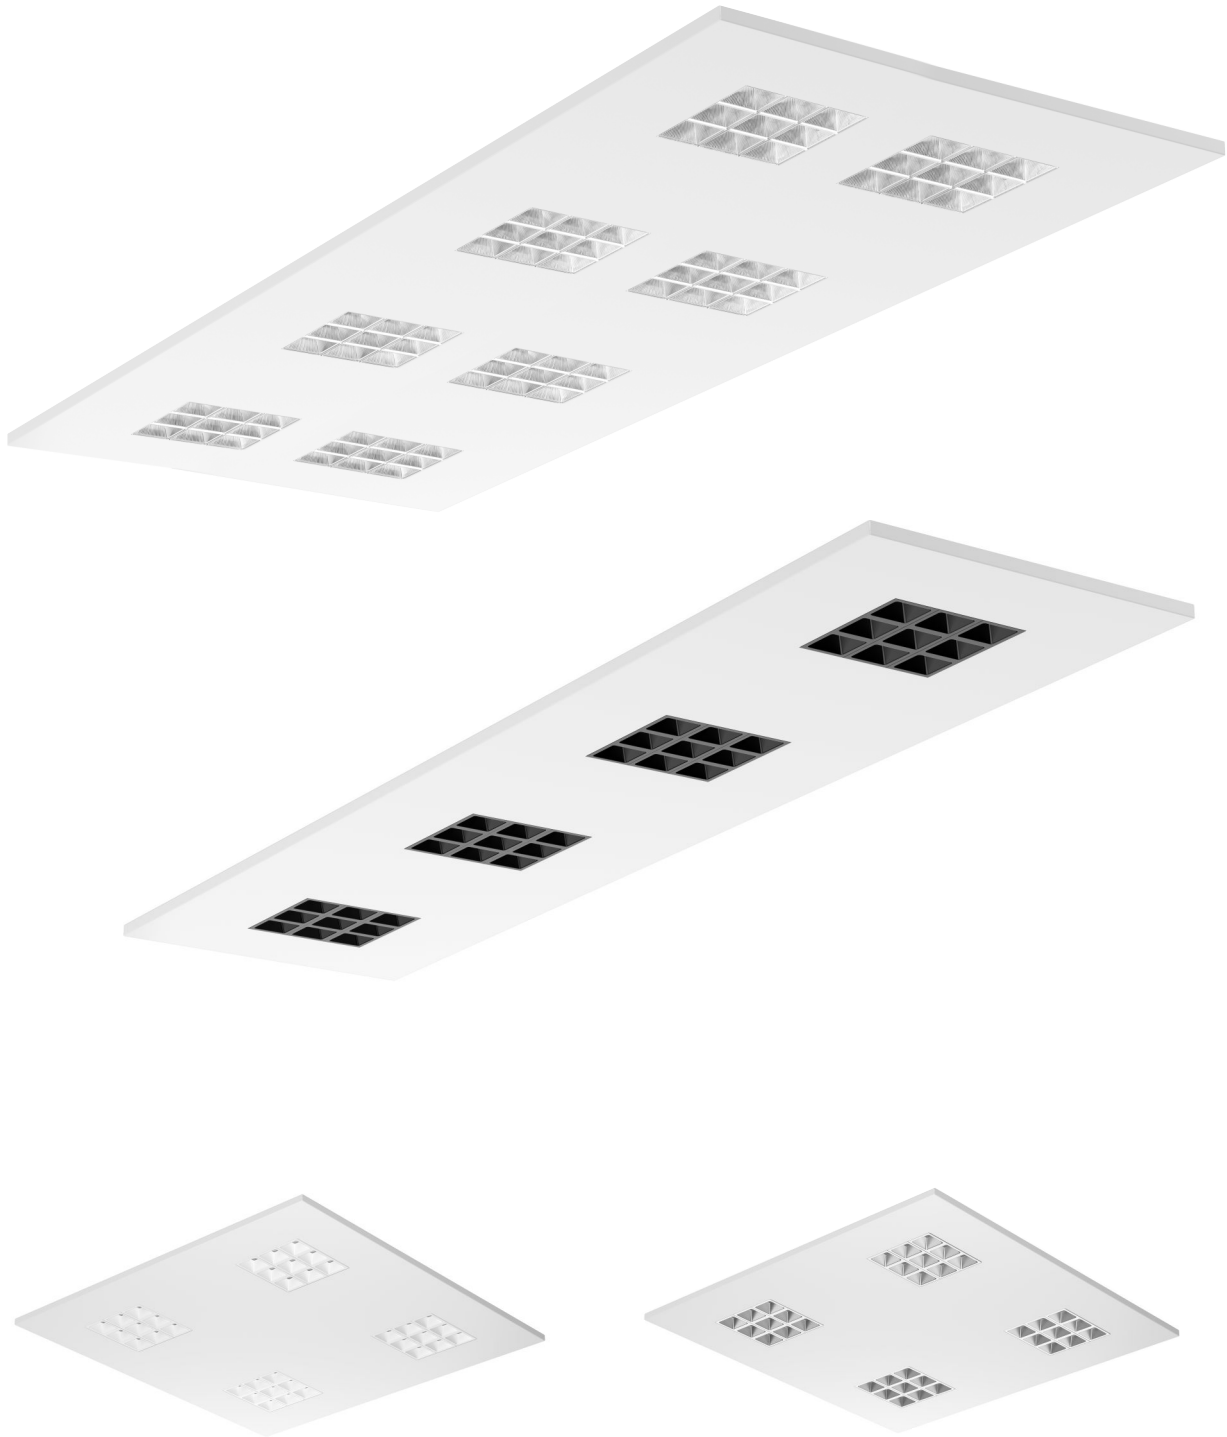

● Dimensional Drawing

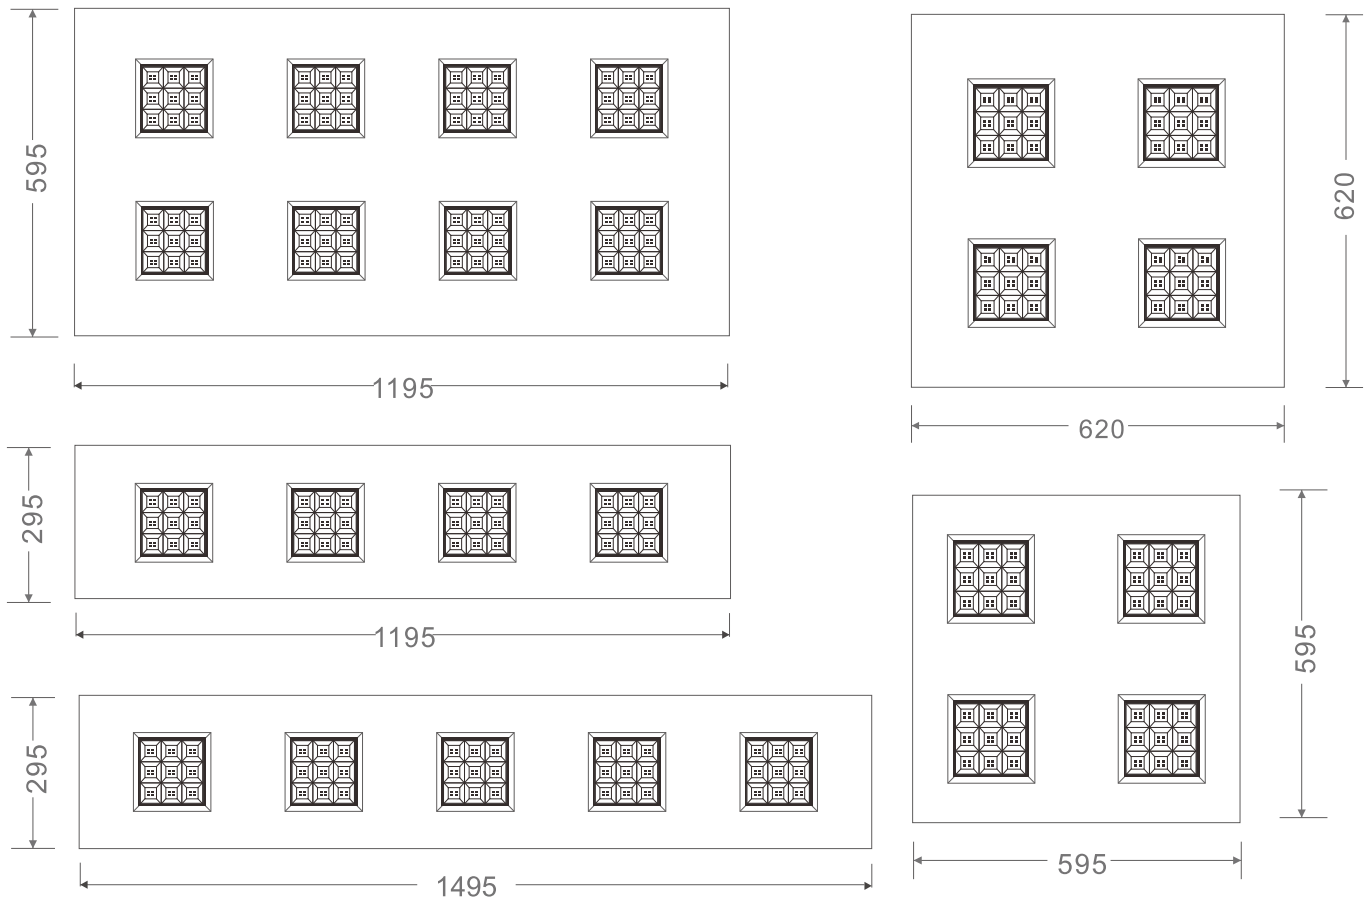


PG-2 series- Parameter


Model No.:	Dimension	Power	Color Temperature	Luminous Efficacy	Lumen	CRI
OL-PG30W-6060-2	600x600mm Actual size(595x595mm)	30W	4000K	>160lm/W	4800lm	>80Ra
OL-PG30W-6262-2	620x620mm Actual size(620x620mm)	30W	4000K	>160lm/W	4800lm	>80Ra
OL-PG30W-30120-2	300x1200mm Actual size(295x1195mm)	30W	4000K	>160lm/W	4800lm	>80Ra
OL-PG40W-30150-2	300x1500mm Actual size(295x1495mm)	40W	4000K	>160lm/W	6400lm	>80Ra
OL-PG60W-60120-2	600x1200mm Actual size(595x1195mm)	60W	4000K	>160lm/W	9600lm	>80Ra

A. Built in Style


1 Take off Ceiling plaster tablet

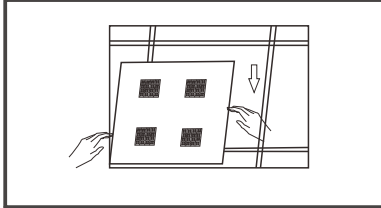


2 Connect the Wire

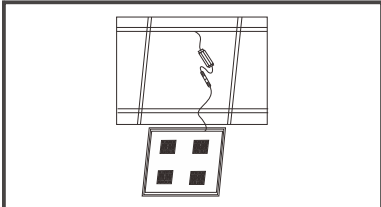

3 Fix the panel Light on into the ceiling screens

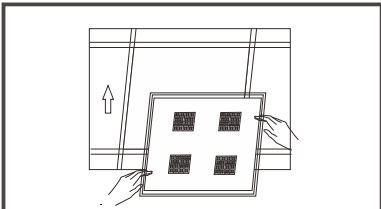


4 After steady the panellight you can connect the electric current to use

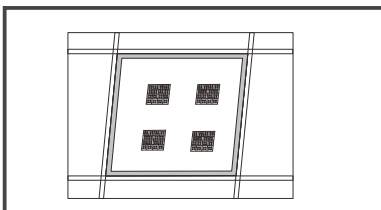


B. Ceiling Style


1. Fix the ceiling frame into the ceiling or wall

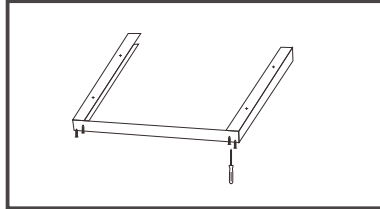


2. Connect the wire (AC/DC Wire) and put the location well

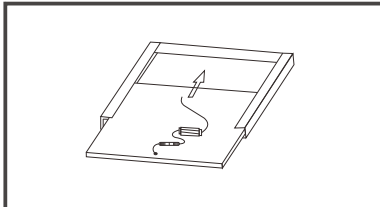

3. Fix the panel light on the ceiling frame

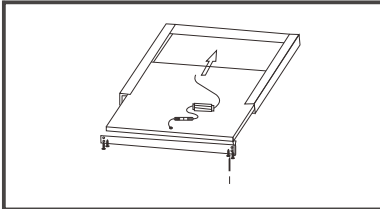


4 After steady the panellight you can connect the electric current to use

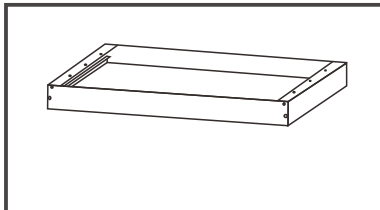


C. Pendant Style


1 Take off the cassette and install the screw cassette

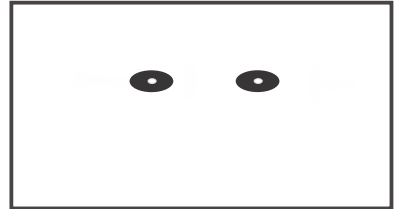


2 Fix the cassette onto the ceiling

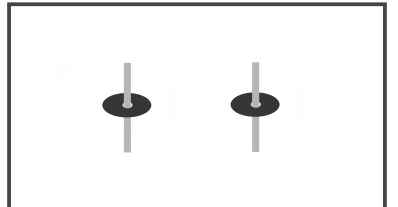

3. Lock the Line controler into the cassette

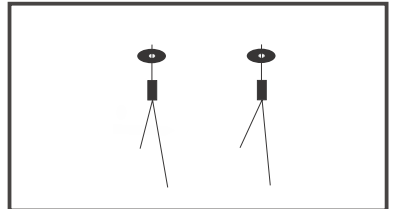

4. Adjust the length of the iron line well and then connect the power supply ,then you can power

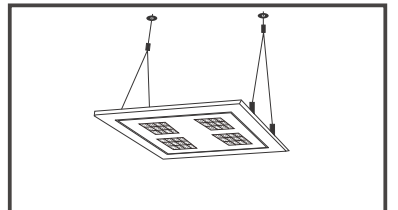

● Product packaging



When calculating freight and volume of cartons, each side shall be increased by 2-3cm (according to the calculation method of freight forwarder).

Product Dimensions	PCS/CTN	N.W/Carton	G.W/Carton	Dimensions	CBM/Carton
600x600 (595x595mm)	4PCS/CTN	13KG/CTN	16KG/CTN	67*22*70.5CM	0.11CBM/Carton
300x1200(295x1195mm)	4PCS/CTN	14KG/CTN	17KG/CTN	127*22*41.5CM	0.12CBM/Carton
620x620(620x620mm)	4PCS/CTN	14KG/CTN	17KG/CTN	69*22*73CM	0.12CBM/Carton
600x1200(595x1195mm)	3PCS/CTN	18KG/CTN	22KG/CTN	127*18*71.5CM	0.17CBM/Carton

Caution

1. In case of electric shock, please make sure the power is off before installation.
2. The lamp should be installed and operated by a qualified electrician or technician in accordance with relevant local codes.
3. Do not use sharp tools near or on the surface of the lamp.
4. Unpack and examine the product carefully. Report any damage and save all packing materials if any portion of the product was damaged during transportation.

● Statement

1. It is only allowed to be used in indoor environments, OLAMLED promises a full warranty for the product.
2. Can not be used in any harsh environment, including high/low temperature, high humidity, high salinity, high ammonia, etc.
3. The warranty policy is no longer warranted in the event of any incorrect application

● Application Scenario

- » Office
- » Hospital
- » School
- » Restaurant
- » Showroom
- » Store
- » Gallery

