


LED Linear Light
-PR-2 Series
(Recessed version)



Parameter

Model No.:	Optional	Surface Dimension	Cut-out Dimension	Power	Color Temperature	(Based on white shell)		CRI	Optional
						Luminous Efficacy	Lumen		Glare value
OL-PD30W-120-S(2)	Single color	1210x62x65mm	1200x52mm	30W	6000-6500K 5000-5500K 4000-4500K 2800-3500K	>140lm/W	>4200lm	>80Ra	UGR>22 UGR<19
OL-PD45W-150-S(2)	Single color	1510x62x65mm	1500x52mm	45W		>140lm/W	>6300lm	>80Ra	
OL-PD30W-120-CCT(2)	CCT:3000-4000-6000K	1210x62x65mm	1200x52mm	30W	3000K/4000K/6000K	>110lm/W	>3400lm	>80Ra	
OL-PD45W-150-CCT(2)	CCT:3000-4000-6000K	1510x62x65mm	1500x52mm	45W		>110lm/W	>5000lm	>80Ra	

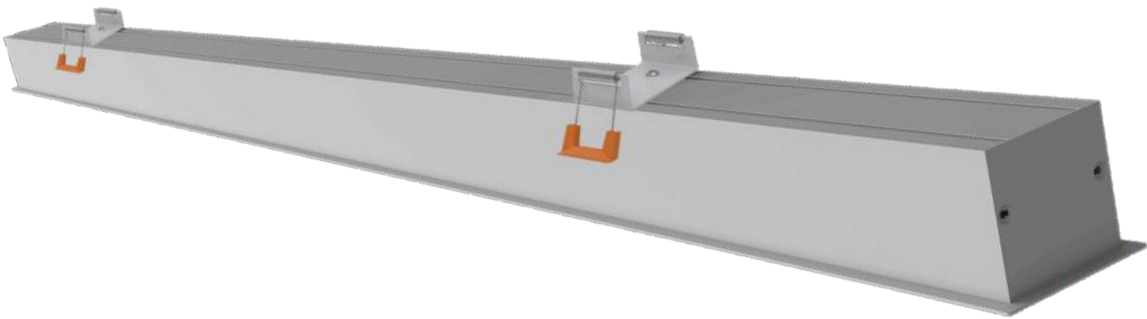

Features

- ◆ Internal drives is designed
- ◆ Recessed installation
- ◆ With Springs easy for install
- ◆ Color of shell: Black & White
- ◆ Diffuser plate: Opal(UGR>22), Prism (UGR<19)
- ◆ Dimming: ON/OFF, 1-10V, DALI-2, D4i etc.
- ◆ Emergency for option

