





LED Recessed Linear Light-PR Series


UGR<16 & UGR<19

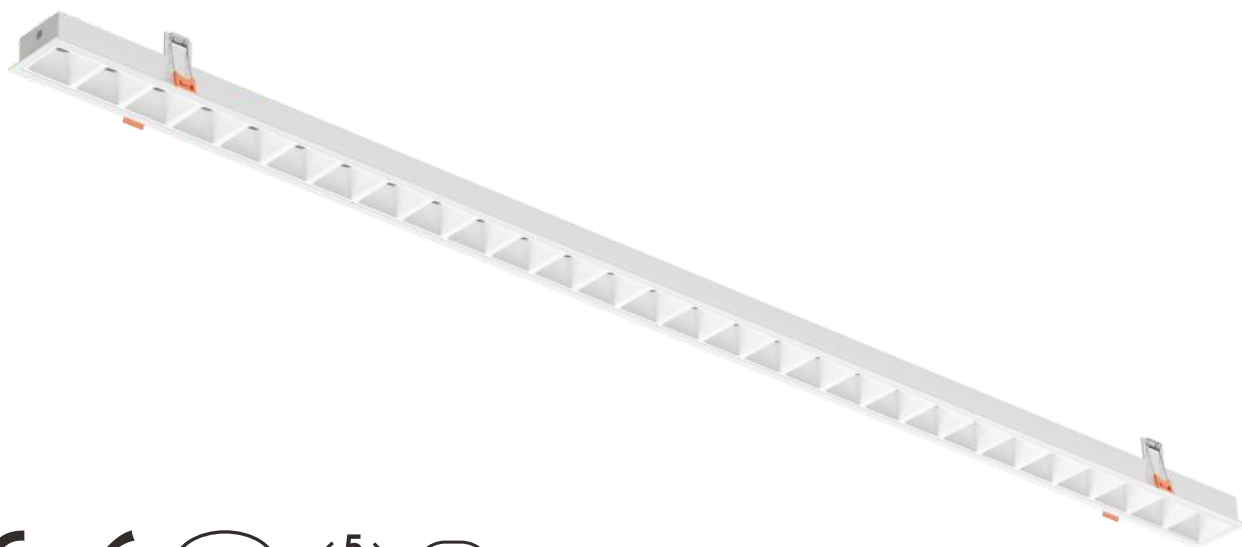

Recessed Linear Light PR series

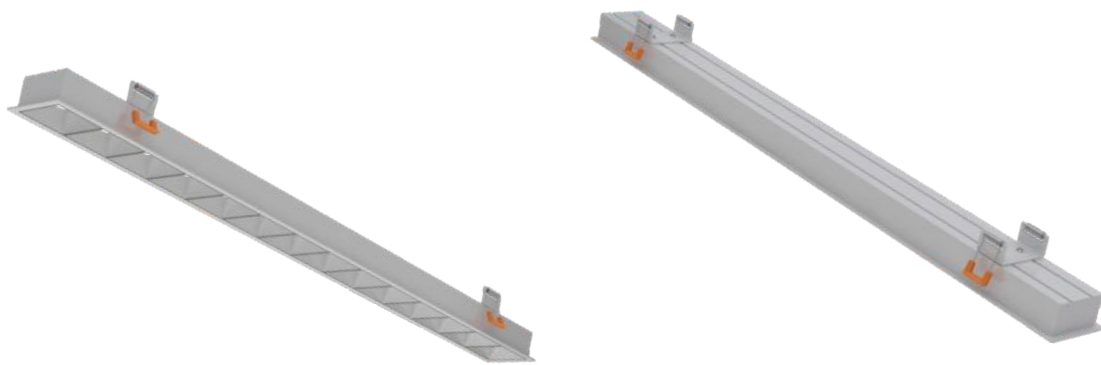

External Driver

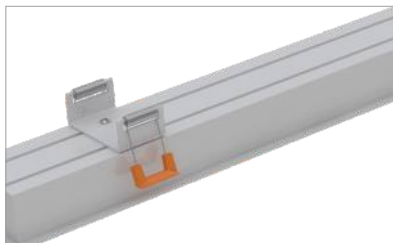

• *Back view*



• *Surface View*



• *Surface View*

Features:

- » External drives is designed for easy replacement
- » Recessed installation
- » With Springs easy for install
- » Color of shell: Black & White
- » Reflector color: White, Black, Silver
- » Dimming: ON/OFF, 1-10V, DALI-2, D4i etc.

Views



A: White Shell + White reflector



B: Black Shell + Black reflector



C: Black Shell + Silver reflector







D: White Shell + Silver reflector

Parameter

Model No.:	Optional	Surface Dimension	Cut-out Dimension	Power	Color Temperature	(Based on white shell)		CRI	Optional Beam angle/Glare value
						Luminous Efficacy	Lumen		
OL-PR15W-60-S	Single color	586x55x25mm	573x44mm	15W	6000-6500K 5000-5500K 4000-4500K 2800-3500K	>140lm/W	>2000lm	>80Ra	UGR<16 with 65° UGR<19 with 90°
OL-PR30W-120-S	Single color	1156x55x25mm	1143x44mm	30W		>140lm/W	>4200lm	>80Ra	
OL-PR45W-150-S	Single color	1443x55x25mm	1431x44mm	45W		>140lm/W	>6300lm	>80Ra	
OL-PR15W-60-CCT	CCT:3000-4000-6000K	586x55x25mm	573x44mm	15W	3000K/4000K/6000K	>110lm/W	>1600lm	>80Ra	
OL-PR30W-120-CCT	CCT:3000-4000-6000K	1156x55x25mm	1143x44mm	30W		>110lm/W	>3400lm	>80Ra	
OL-PR45W-150-CCT	CCT:3000-4000-6000K	1443x55x25mm	1431x44mm	45W		>110lm/W	>5000lm	>80Ra	

Dimensional Drawing



Application Scenario

- » Office
- » Hospital
- » School
- » Restaurant
- » Showroom
- » Store
- » Supermarket

